


Striker bushings

- Burnished ground hardened steel.

Striker bushings are used together with ball or bolt spring plungers when a contact surface is required with high wear resistance. In particular, they are recommended for use with plungers with high-loaded springs and plungers with reinforced spring.

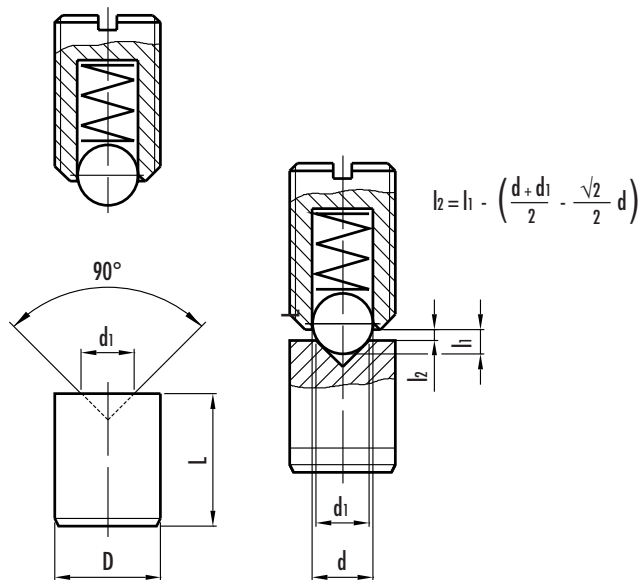


Standard elements	Main dimensions						Weight
Description	D ^{-0.01} _{-0.03}	d	d1	L ^{±0.05}	l1	★	grams
GN 249-4	4	See the corresponding plunger	1.5	5	See the corresponding plunger	M4	1
GN 249-5	5		2	6		M5	1
GN 249-6	6		2	8		M6	2
GN 249-8	8		3	10		M8	4
GN 249-10	10		4	12		M10	7
GN 249-12	12		6	14		M12	12
GN 249-16	16		8	18		M16	26

★ Threading of the corresponding plunger GN 614 - GN 615 - GN 615.1 - GN 616

Indent blocks for spring plungers

- Hardened black oxide sintered steel.

GN 250 indent blocks are used together with spring plungers (GN 614, GN 615 and GN 615.2) for detenting or positioning sliding parts, flaps or for similar application.

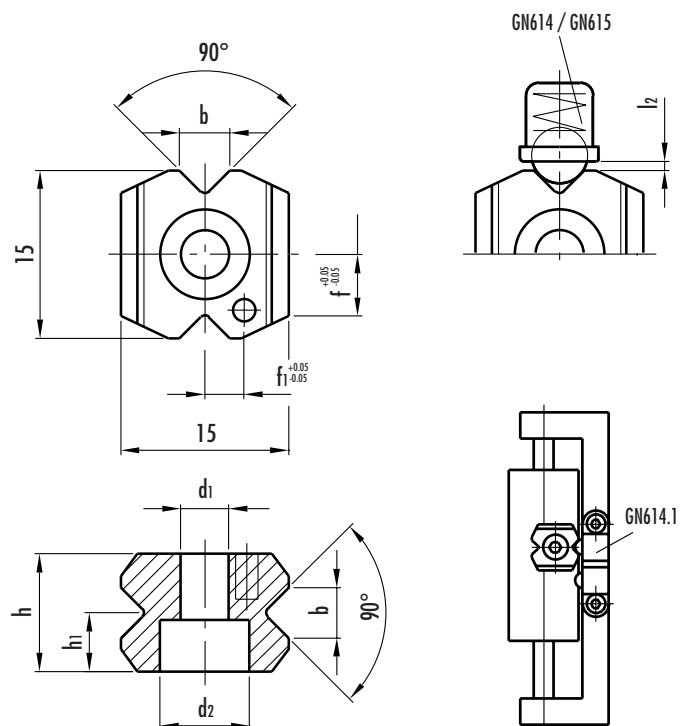

Standard elements	Main dimensions							GN 614	GN 615	GN 615.2	Weight	
Description	h	h1	b ^{-0.1}	d1	d2	f	f1	Dim.	l2	Dim.	l2	grams
GN 250-8.5	8.5	4.6	3.4	4.3	8	5	3.5	6	0.9	M8	0.8	10
GN 250-10.5	10.5	4.6	4.5	4.3	8	5	3.5	8	1	M10	1	11